



Osirion 10 RGBW



LED UPLIGHT & WALL LIGHT

ILLUMINATE YOUR WORLD

Specification Code Example showing how to specify a Osirion 10 luminaire.

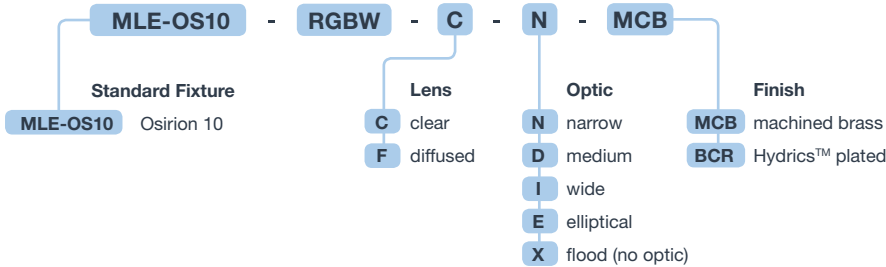


Specifications

IP rating	Ingress Protection - IP68
Materials & finish	thermally optimised DZR brass optional Hydrics™ plated finish
Lens	clear or diffused 8mm tempered glass
Light source	CREE™ MC-E quad chip RGBW LED
CRI	variable depending on colour mix
Performance	> 70% lumen maintenance at 50,000 hours
Optic (FWHM)	narrow 14°, medium 29°, wide 38°, elliptical 44° x 12° flood > 100° (no optic) offers the widest distribution
Efficacy	up to 100 lumens per watt
Power	10 watts total
Control	DMX 512 or DALI (using the DALI to DMX bridge)
Power supply	Optimo QUAD™ MLE-OM-DMX4
	4 Channels / 1 Group
	12 luminaires

All dimensions shown are in millimetres (mm)



FINISH OPTIONS



Accessories




MEGABAY PCB LINK BOARD
MLE-RGBW-LK





MEGABAY 10 CORE CABLE
MLE-RGBW-?M

SQUARE BLOCKOUT






153 sq

ROUND BLOCKOUT



153 ∅

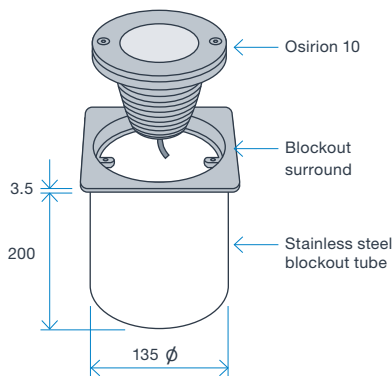

For the latest information visit - www.megabay.com/osirion

Specifications are subject to change without notice. CREE™ is a registered trademark of CREE Inc.